



PURPLE K DRY CHEMICAL

RUGGED

- 6-Year manufacturer's warranty
- Stored-pressure design
- Dependable drawn-steel cylinders
- Durable high-gloss polyester powder paint
- All-metal valve construction

BRASS VALVE—Heavy Duty

- Chrome-plated brass valve body
- Stainless steel handle & lever

ALUMINUM VALVE—Light to Medium Duty

- Anodized aluminum valve body
- Anodized aluminum handle & lever
- Temperature range -65°F to 120°F


USER-FRIENDLY

- Easy and economical to maintain and service
- QR coded and multilingual labels

OPTION

- USCG approved with bracket listed on UL label
- Chrome cylinders (see chart below)

PURPLE K extinguishers contain specially fluidized and siliconized potassium bicarbonate dry chemical that is particularly effective on Class B flammable liquids, pressurized gases, and Class C electrical fires. It is electrically nonconductive. **PURPLE K** has been the choice of oil, gas, chemical, and utilities industries as the preferred fire-fighting agent.

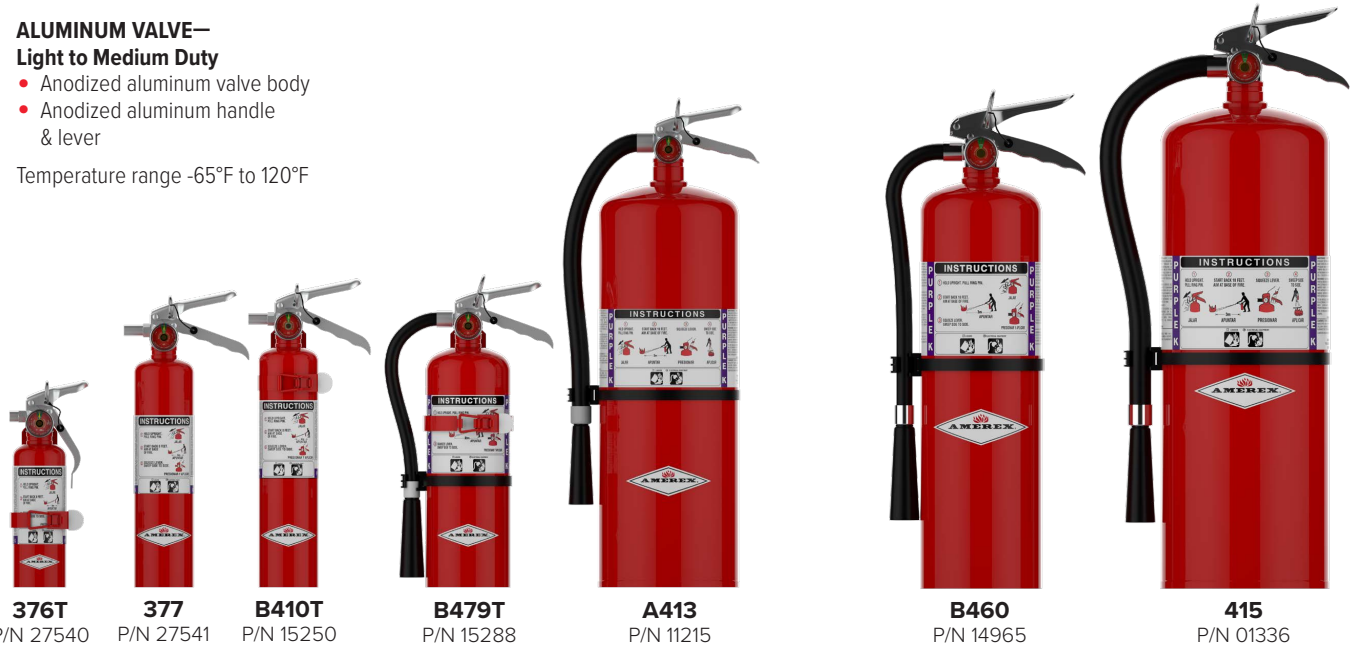

376T
P/N 27540

377
P/N 27541

B410T
P/N 15250

B479T
P/N 15288

A413
P/N 11215

B460
P/N 14965

415
P/N 01336

ALUMINUM VALVE

BRASS VALVE

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
COMPLIES WITH NFPA 10 STANDARD
ISO-9001/ ISO-14001 CERTIFIED UL LISTED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S504 - UL 299 &
CAN/ULC-S508 - UL 711



AVAILABLE IN WHEELED EXTINGUISHERS

LARGEST SELECTION OF EXTINGUISHER SIZES AND OPTIONS AVAILABLE

AGENT TYPE	PURPLE K DRY CHEMICAL						
VALVE TYPE	Anodized Aluminum					Chrome-Plated Brass	
DESIGN	Nozzle			Hose & Nozzle			
MODEL NUMBER	376T	377	B410T	B479/B479T	A413	B460	415
UL & ULC RATING	2B:C	10B:C	10B:C	30B:C	120B:C	80B:C	120B:C
CAPACITY (LBS.)	1	2.5	2.5	5	20	10	20
*SHIPPING WT. (LBS.)	2.25	5.5	5.5	9.5	36.4	19.5	38
HEIGHT (IN.)	10.25	14.79	15.5	15.25	24	20.5	24
WIDTH (IN.)	3.94	5.5	5.5	7.25	10.25	8.75	10.25
DEPTH (IN.)	2.63	3	3	4.25	7	5	7
RANGE (INITIAL - FT.)	5-8	5-8	9-15	12-18	15-21	15-21	15-21
DISCHARGE TIME (SEC.)	8.5	8.5	9.5	12	28	22	28
OPTIONAL CHROME CYLINDER	Yes		Yes	Yes		Yes	
NOMINAL OPERATING PRESSURE	125 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG	195 PSIG
INCLUDED BRACKET	Vehicle	Wall	Vehicle	Wall/Vehicle		Wall	

*Shipping weight includes box.

